

# PMCA

---

## Micro ATX Industrial Motherboard

### User's Manual

**Edition 1.0**

2006/07/05



## **Copyright**

Copyright 2006. All rights reserved. This document is copyrighted and all rights are reserved. The information in this document is subject to change without prior notice to make improvements to the products.

This document contains proprietary information and protected by copyright. No part of this document may be reproduced, copied, or translated in any form or any means without prior written permission of the manufacturer.

All trademarks and/or registered trademarks contains in this document are property of their respective owners.

## **Disclaimer**

The company shall not be liable for any incidental or consequential damages resulting from the performance or use of this product.

The company does not issue a warranty of any kind, express or implied, including without limitation implied warranties of merchantability or fitness for a particular purpose.

The company has the right to revise the manual or include changes in the specifications of the product described within it at any time without notice and without obligation to notify any person of such revision or changes.

## **Trademark**

All trademarks are the property of their respective holders.

---

Any questions please visit our website at <http://www.commell.com.tw>

## Packing List

Please check the package before you starting setup the system


### Hardware:

PMCA series motherboard x 1

### Cable Kit:




40-pin ATA100 IDE Cable x 1

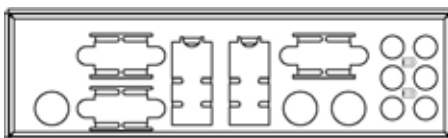

I/O Shield x 1




SATA Cable x 2



Printer port Cable x 1



Composite Cable x 1



YPbPr Cable x 1



COM port Cable x 2



Floppy Cable x 1



CPU Cooler x 1

### Printed Matters:

User's Manual x 1

Driver CD x 1

# Index

- Chapter 1 <Introduction>.....7**
  - 1.1 <Product Overview>.....7
  - 1.2 <Product Specification> .....8
  - 1.3 <Mechanical Drawing>.....10
  - 1.4 <Block Diagram>.....11
- Chapter 2<Hardware Setup> .....12**
  - 2.1 <Connector Location>.....12
  - 2.2 <Jumper Reference>.....13
  - 2.3 <Connector Reference>.....14
    - 2.3.1 <Internal Connector>.....14
    - 2.3.2 <External Connector>.....14
  - 2.4 <CPU and Memory Setup>.....15**
    - 2.4.1< CPU Setup> ..... 15
    - 2.4.2 <Memory Setup> ..... 16
  - 2.5 <CMOS Setup>.....17**
  - 2.6 <Enhanced IDE & CF Interface>.....18**
  - 2.7 <Serial ATA Interface>.....19**
  - 2.8 <Floppy Port>.....19**
  - 2.9 <LAN Interface>.....20**
  - 2.10 <Onboard Display Interface>.....20**
    - 2.10.1 <Analog VGA Interface>.....20
    - 2.10.2 < Digital Display >.....21
    - 2.10.3 <HDTV Interface>.....24
  - 2.11 <Onboard Audio Interface>.....25**
  - 2.12 <USB2.0 Interface>.....26**
  - 2.13 <GPIO Interface>.....28**
  - 2.14 <Serial Port Jumper Setting>.....29**

<b>2.15 &lt;Power and Fan Connector&gt;</b> .....	<b>31</b>
2.15.1 <Power Connector>.....	31
2.15.2 <Fan Connector>.....	31
<b>2.16 &lt;Indicator and Switch&gt;</b> .....	<b>33</b>
<b>2.17 &lt;Expansion Interface&gt;</b> .....	<b>34</b>
<b>Chapter 3 &lt;System Configuration&gt;</b> .....	<b>36</b>
<b>3.1 &lt; Video Memory Setup &gt;</b> .....	<b>36</b>
<b>Chapter 4 &lt;BIOS Setup&gt;</b> .....	<b>38</b>
<b>Appendix A &lt;I/O Port Pin Assignment&gt;</b> .....	<b>40</b>
A.1 <IDE Port>.....	40
A.2 <Serial ATA Port>.....	40
A.3 <Floppy Port>.....	41
A.4 <IrDA Port>.....	41
A.5 <Serial Port>.....	42
A.6 < CRT Port >.....	42
A.7 <LAN Port>.....	43
A.8 <USB Port>.....	43
<b>Appendix B &lt;Flash BIOS&gt;</b> .....	<b>44</b>
B.1BIOS Auto Flash Tool.....	44
B.2Flash Method.....	44
<b>Appendix C &lt;System Resources&gt;</b> .....	<b>45</b>
C.1 I/O Port Address Map .....	45
C.2 Memory Address Map .....	47
C.3 System IRQ Resources.....	48
<b>Appendix D &lt;Watch Dog Timer Setting&gt;</b> .....	<b>49</b>
<b>Contact Information</b> .....	<b>51</b>

**(The Page is Left For Blank)**

## Chapter 1 <Introduction>

### 1.1 <Product Overview>

**PMCA** is the micro ATX industrial motherboard, with supporting Intel Core Duo/Core Solo processors for 533/667MHz front side bus, Intel 945GM and ICH7-M chipset, integrated GMA950 graphics, DDR2 memory, Realtek High Definition Audio, Serial ATA, PCI Express x1,x16 interface and two Intel 82537L Gigabit LAN .

#### Intel Yonah dual core Processor

The board supports Intel Core Duo/Core Solo processors with 533/667MHz front side bus, 2MB L2 cache, to provide more powerful performance than before.

#### New features for Intel 945GM chipset

The board integrates Intel 945GM and ICH7-M chipset, to provide new generation of the mobile solution, supports Intel GMA950 graphics, DDR2 533/667 memory, built-in high speed mass storage interface of serial ATA, High Definition Audio with 7.1 channels surrounding sound.

#### All in One multimedia solution

Based on Intel 945GM and ICH7-M chipset, the board provides high performance onboard graphics, 18-bit Dual channel LVDS interface, HDTV and 7.1 channels High Definition Audio, to meet the very requirement of the multimedia application.

#### Flexible Extension Interface

The board provides one PCI-Express x16 slots for graphics card, it also can support PCI-Express x1 for LAN card or other devices. The board also provides CompactFlash Type II slot and one mini-PCI socket.

## 1.2 <Product Specification>

### General Specification

Form Factor	micro ATA industrial motherboard
CPU	Intel® Core Duo/Core Solo processor Package type: Micro- FCPGA478 Front side bus: 533/667MHz
Memory	2 x 240-pin DDR2 533/667MHz SDRAM up to 3GB Up to 10.67GB/s of bandwidth with dual-channel interleaved mode Dual-Channel technology supported Unbuffered, none-ECC memory supported only
Chipset	Intel® 945GM and ICH7-M
BIOS	Phoenix-Award v6.00PG 4Mb PnP flash BIOS
Green Function	Power saving mode includes doze, standby and suspend modes. ACPI version 1.0 and APM version 1.2 compliant
Watchdog Timer	System reset programmable watchdog timer with 1 ~ 255 sec./min. of timeout value
Real Time Clock	Intel® ICH7-M built-in RTC with lithium battery
Enhanced IDE	UltraATA100 IDE interface supports up to 2 ATAPI devices One 40-pin IDE port onboard One CompactFlash Type II socket on solder side
Serial ATA	Intel® ICH7-M integrates 2 Serial ATA interfaces(No RAID Function) Up to 150MB/s of transfer rate

### Multi-I/O Port

Chipset	Intel® ICH7-M with Winbond® W83627THG controller
Serial Port	Two external & four internal RS-232 serial ports
USB Port	Four external & four internal Hi-Speed USB 2.0 ports with 480Mbps of transfer rate
Parallel Port	One 26-pin internal parallel port
Floppy Port	One 34-pin internal Floppy port
IrDA Port	One IrDA compliant Infrared interface supports SIR
K/B & Mouse	External PS/2 keyboard and mouse ports on rear I/O panel
GPIO	One 12-pin Digital I/O connector with 8-bit programmable I/O interface
Smart Fan	One CPU fan connectors for fan speed controllable

### VGA Display Interface

Chipset	Intel® 945GM GMCH (Graphic Memory Controller Hub)
Frame Buffer	Up to 224MB shared with system memory
Display Type	CRT, LCD monitor with analog display
Connector	External DB15 female connector on rear I/O panel Onboard 40-in LVDS connector



---

Onboard Mini Din 7-pin TV-out connector

### Ethernet Interface

Controller	2 x Intel 82573L Gigabit Ethernet controller
Type	Triple speed 10/100/1000Base-T auto-switching Fast Ethernet Full duplex, IEEE802.3U compliant
Connector	Two External RJ45 connector with LED on rear I/O panel

### Audio Interface

Chipset	Intel® ICH7M with Realtek® ALC880 High Definition Audio compliance
Interface	7.1 channels sound output
Connector	External Audio phone jack for Line-out, Line-in, MIC-in, Surround, Center and Backsurround Onboard audio connector with pin header Onboard CD-IN and SPDIF connector

### Expansive Interface

PCI-Express	One x16 PCI-Express slot ( <b>compatible with x1 slot</b> ) One x1 PCI-Express slot Up to 8GB/s of transfer bandwidth Power supply: +3.3V, +12V
PCI	One Mini-PCI socket for <b>TYPE III A</b> (32-bit, 33MHz) Two PCI slot Power supply: +3.3V, +5V
ISA	One ISA slot

### Power and Environment

Power Requirement	Standard 24-pin ATX power supply (20-pin is compatible)
Dimension	244 (L) x 244 (H) mm
Temperature	Operating within 0 ~ 60°C (32 ~ 140°F) Storage within -20 ~ 85°C (-4 ~ 185°F)

### Ordering Code

<b>PMCA</b>	Intel Core Duo processor with onboard VGA, AUDIO, HDTV, ISA, SATA, Giga LAN, USB2.0, LPT, CF, GPIO, LVDS, Mini PCI
-------------	--

---

The specifications may be different as the actual production.

For further product information please visit the website at <http://www.comnell.com.tw>

Technical drawing of a PMCA (Pneumatic Motor Control Assembly) showing top and side views with dimensions in inches.

**Top View Dimensions:**

- Overall width: 9.60
- Overall height: 9.35
- Distance from top edge to first port: 9.08
- Distance between first and second ports: 8.12
- Distance between second and third ports: 7.10
- Distance between third and fourth ports: 6.24
- Distance between fourth and fifth ports: 5.23
- Distance between fifth and sixth ports: 4.03
- Distance between sixth and seventh ports: 3.15
- Distance from seventh port to right edge: 1.35
- Distance from left edge to first port: 0.40
- Distance from left edge to second port: 3.91
- Distance from left edge to third port: 5.11
- Distance from left edge to fourth port: 5.66
- Distance from left edge to fifth port: 6.50
- Distance from left edge to sixth port: 9.35
- Distance from left edge to seventh port: 9.60


**Side View Dimensions:**

- Overall height: 9.60
- Overall width: 9.35
- Distance from top edge to first port: 9.08
- Distance between first and second ports: 8.12
- Distance between second and third ports: 7.10
- Distance between third and fourth ports: 6.24
- Distance between fourth and fifth ports: 5.23
- Distance between fifth and sixth ports: 4.03
- Distance between sixth and seventh ports: 3.15
- Distance from seventh port to right edge: 1.35
- Distance from left edge to first port: 0.40
- Distance from left edge to second port: 3.91
- Distance from left edge to third port: 5.11
- Distance from left edge to fourth port: 5.66
- Distance from left edge to fifth port: 6.50
- Distance from left edge to sixth port: 9.35
- Distance from left edge to seventh port: 9.60

**Labels:**


- PMCA
- MADE IN THE USA
- WARNING

# 1.4 <Block Diagram>

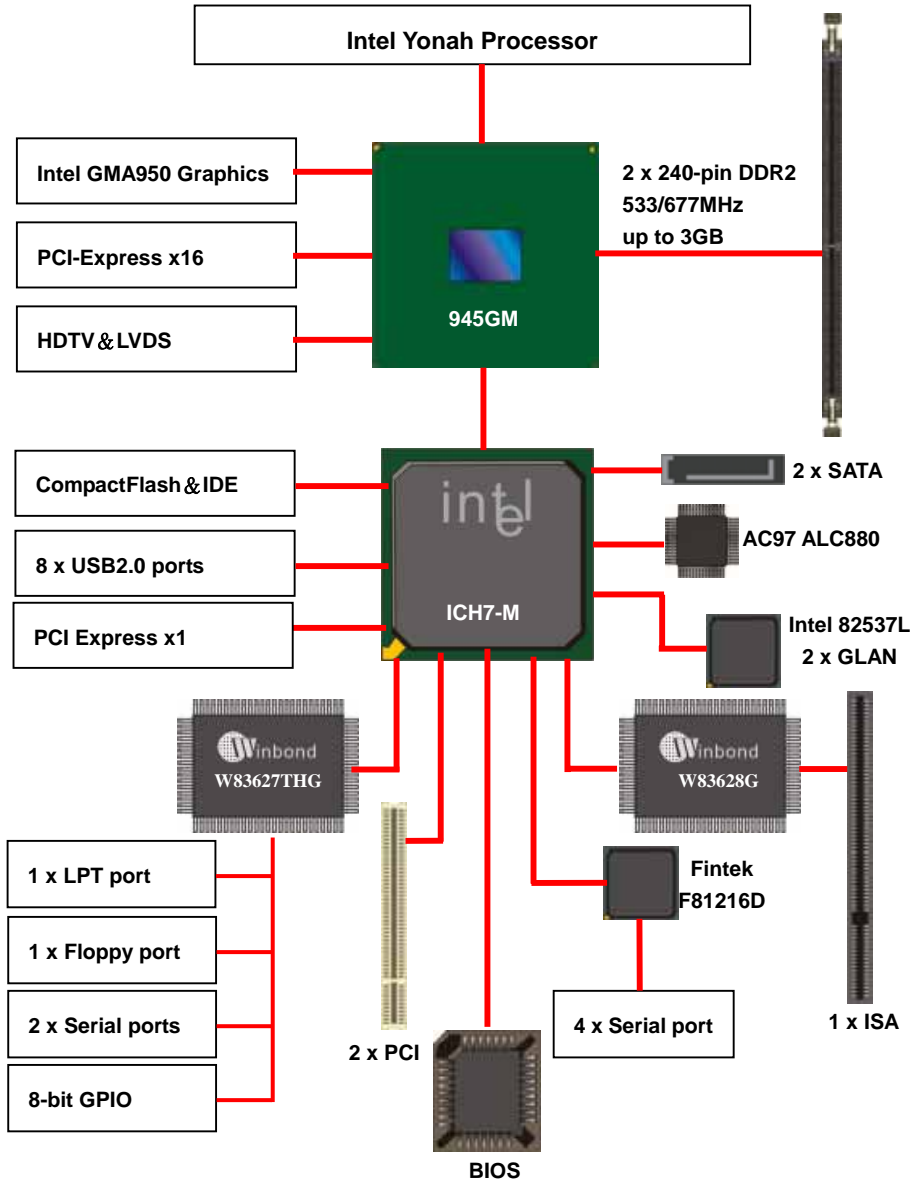


# Chapter 2 <Hardware Setup>

## 2.1 <Connector Location>

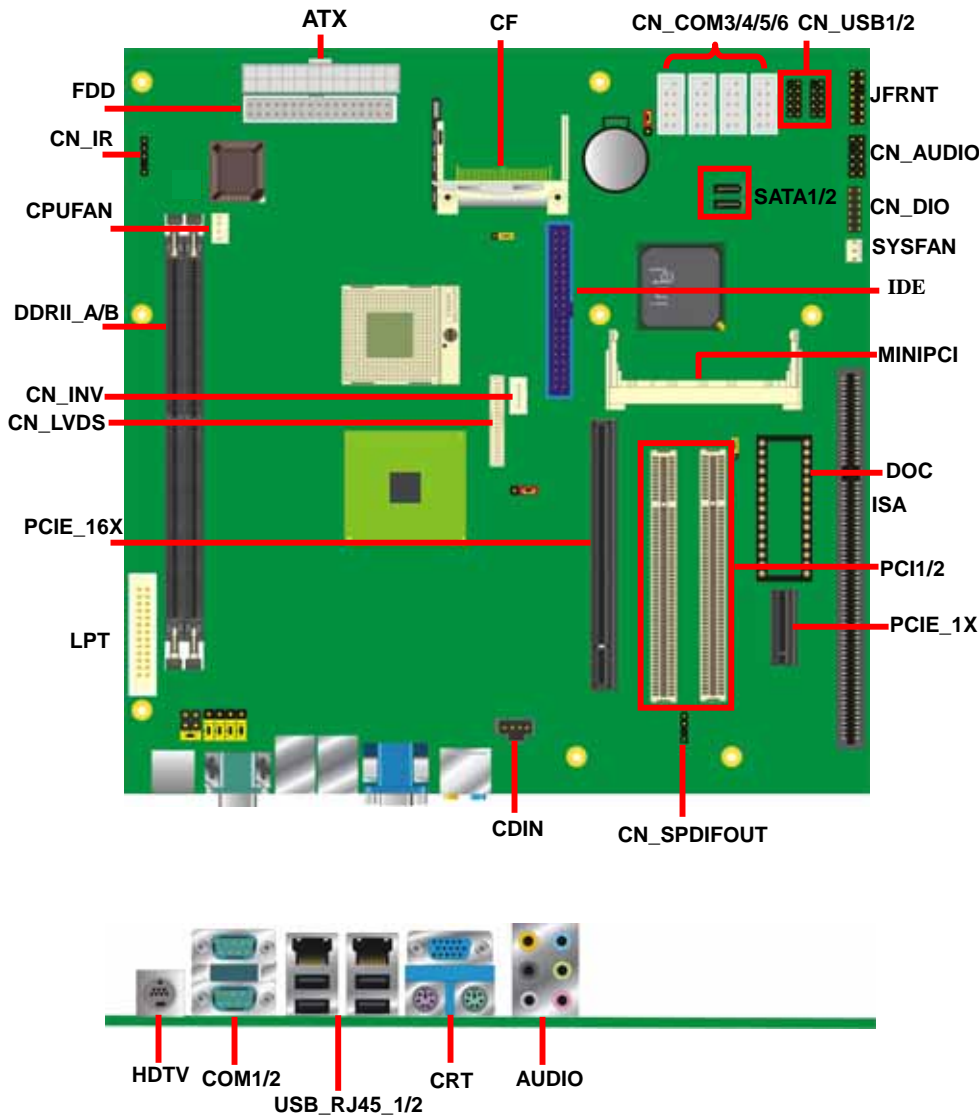

2.2 <Jumper Reference>

Jumper	Function
JRTC	CMOS Operating/Clear Setting
JCFSEL	Compact Flash address mode setting
JVLCD	LCD Panel Voltage Setting
JDOC	Setting address
JCSEL1/2	COM2 RS-232/422/485 Mode Selection

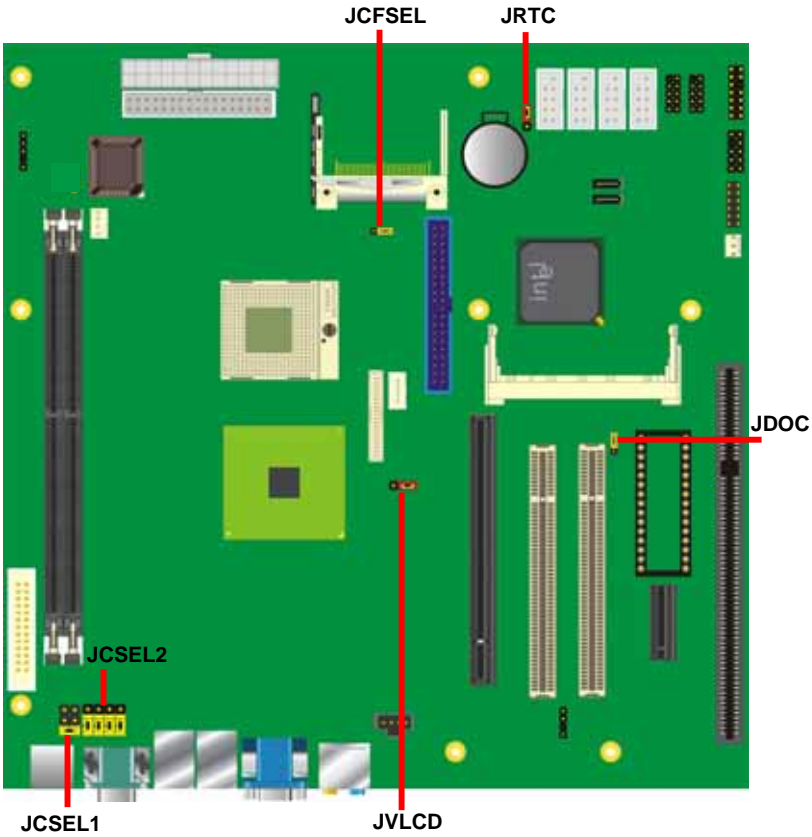

## 2.3 <Connector Reference>

### 2.3.1 <Internal Connector>

Connector	Function	Remark
DDRIIA/B	240 -pin DDR2 SDRAM DIMM slot	Standard
IDE	40-pin primary IDE connector	Standard
FDD	34-pin Floppy connector	Standard
SATA1/2	7-pin Serial ATA connector	Standard
ATX	24-pin power supply connector	Standard
CN_AUDIO	5 x 2-pin audio connector	Standard
CDIN	4-pin CD-ROM audio input connector	Standard
CN_DIO	6 x 2-pin digital I/O connector	Standard
CN_USB1/2	5 x 2-pin USB connector	Standard
CPUFAN	4-pin CPU cooler fan connector	Standard
SYSFAN	3-pin system cooler fan connector	Standard
CN_COM3/4/5/6	5 x 2-pin com connector	Standard
CN_IR	5-pin IrDA connector	Standard
CN_SPDIFOUT	Digital audio optical interface	Standard
CF	Compact Flash Type II socket	Standard
CN_LVDS	20 x 2-pin LVDS connector	Standard
CN_INV	5-pin LCD inverter connector	Standard
PCI1/2	32-bit PCI slot	Standard
MINIPCI	Mini-PCI socket	Standard
LPT	13 x 2-pin printer connector	Standard
JFRNT	14-pin switch/indicator connector	Standard
DOC	32-pin DiskOnChip socket	Standard
PCIE_16X	PCI Express 16x slot	Standard
PCIE_1X	PCI Express 1x slot	Standard
ISA	16-bit/8-bit ISA slot	Standard


### 2.3.2 <External Connector>

Connector	Function	Remark
HDTV	Mini Din 7-pin TV out	Standard
COM1/2	Serial port connector	Standard
USB_RJ45_1/2	Dual USB and RJ45 LAN connector	Standard
CRT	DB15 analog VGA + PS/2 keyboard mouse connector	Standard
AUDIO	Audio connectors	Standard

## 2.4 <CPU and Memory Setup>

### 2.4.1 <CPU Setup>


The board comes with the socket479 for Intel Core Duo/Core Solo processor , it supports new generation of Intel Core Duo processor with 533/667MHz of front side bus and 2MB L2 cache. Please follow the instruction to install the CPU properly.



1. Use the flat-type screw drive to unlock the CPU socket



Unlock way

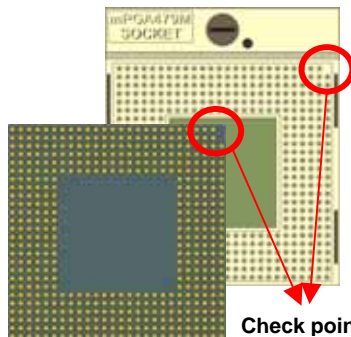

Check point



2. Follow the pin direction to install the processor on the socket



3. Lock the socket

## 2.4.2 <Memory Setup>

The board provides two 240-pin DDR2 DIMMs to support DDR2 533/667 memory modules up to 3GB of capacity. Non-ECC, unbuffered memory is supported only. While applying two same modules, dual channel technology is enabled automatically for higher performance.

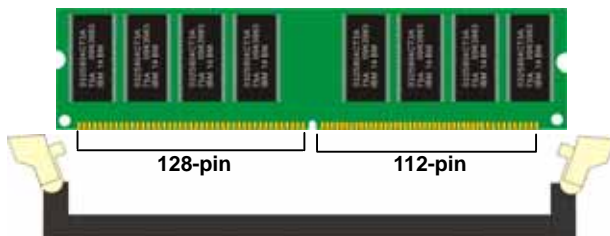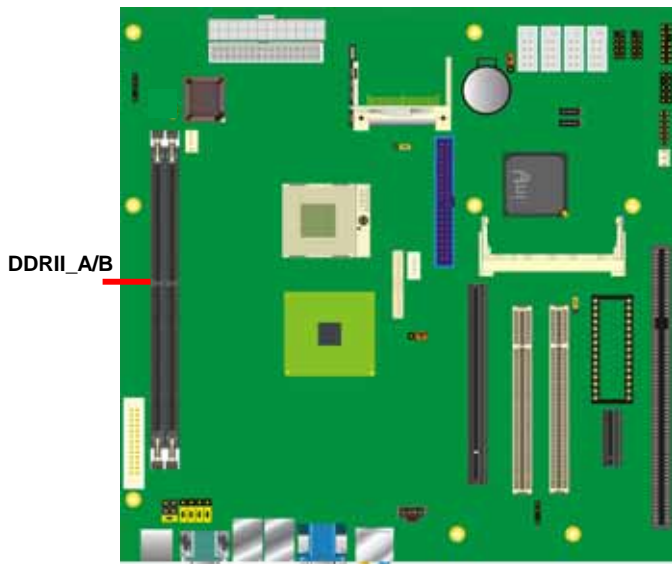

Please check the pin number to match the slot side well before installing memory module.




## 2.5 <CMOS Setup>

The board's data of CMOS can be setting in BIOS. If the board refuses to boot due to inappropriate CMOS settings, here is how to proceed to clear (reset) the CMOS to its default values.

**Jumper: JRTC**

**Type: Onboard 3-pin jumper**

JRTC	Mode
1-2	Clear CMOS
2-3	Normal Operation
Default setting	

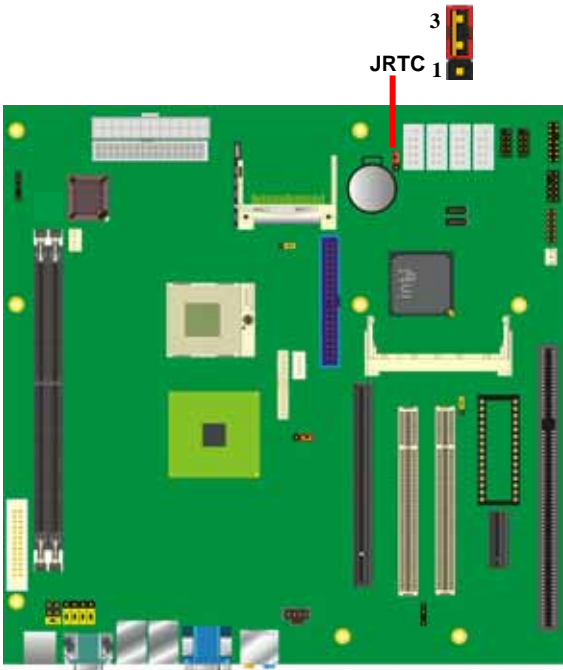

## 2.6 <Enhanced IDE & CF Interface>

The board has one UltraATA100 IDE interface to support up to 2 ATAPI devices, and one CompactFlash Type II socket on the solder side, with jumper **JCFSEL** for IDE master/slave mode selection.

Jumper: **JCFSEL**


Type: onboard 3-pin header

JCFSEL	Mode
1-2	Master
2-3	Slave
Default setting	

Jumper: **JDOC**


Type: onboard 3-pin header

JDOC	DiskOnChip Address
1-2	D800h
2-3	D000h
Default setting	

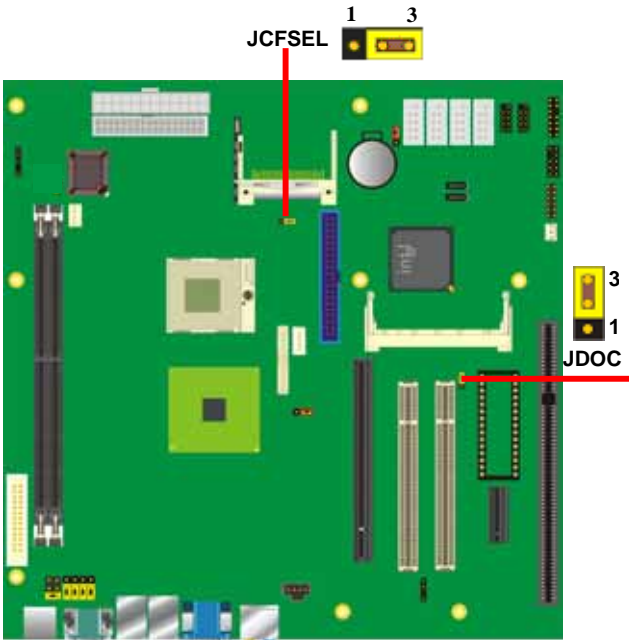


## 2.7 <Serial ATA Interface>

Based on Intel ICH7-M, the board provides two Serial ATA interfaces with up to 150MB/s of transfer rate.

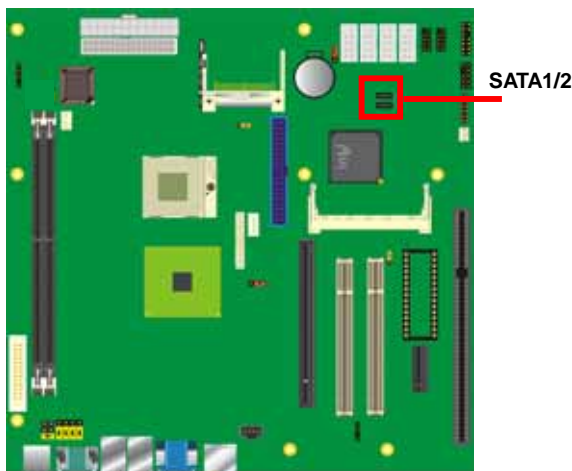


## 2.8 <Floppy Port>

PMCA has one 34-pin floppy interface, it supports use floppy and powering from onboard, please follow up the steps below to install the device.

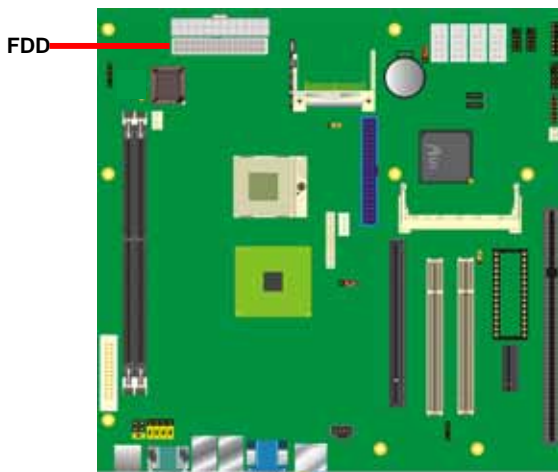

## 2.9 <LAN Interface>

The board integrates with two Intel 82573L PCI Express Gigabit Ethernet controllers, as the PCI Express 1x can speed up to 250MB/s of transfer rate instead of late PCI bus with 133MB/s of transfer rate. The Intel 82573L supports triple speed of 10/100/1000Base-T, with IEEE802.3 compliance and Wake-On-LAN supported.

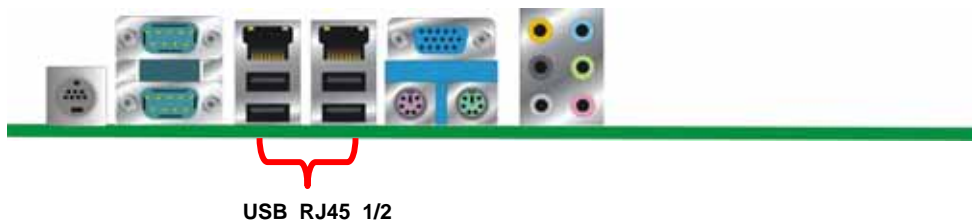

## 2.10 <Onboard Display Interface>

Based on Intel 945GM chipset with built-in GMA (Graphic Media Accelerator) 950 graphics, the board provides one DB15 connector on real external I/O port, and one 40-pin LVDS interface with 5-pin LCD backlight inverter connector. The board provides dual display function with clone mode and extended desktop mode for CRT and LCD. The board also provides DVO port on PCI Express slot to support DVI interface with add on card.

*Notice: When you install any PCI Express Graphic card, the onboard graphics would be disabled automatically.*


### 2.10.1 <Analog VGA Interface>

Please connect your CRT or LCD monitor with DB15 male connector to the onboard DB15 female connector on rear I/O port.



2.10.2 <Digital Display>

The board provides one 40-pin LVDS connector for 18-bit dual channel panel, supports up to 1600 x 1200 (UXGA) of resolution, with one LCD backlight inverter connector and one jumper for panel voltage setting

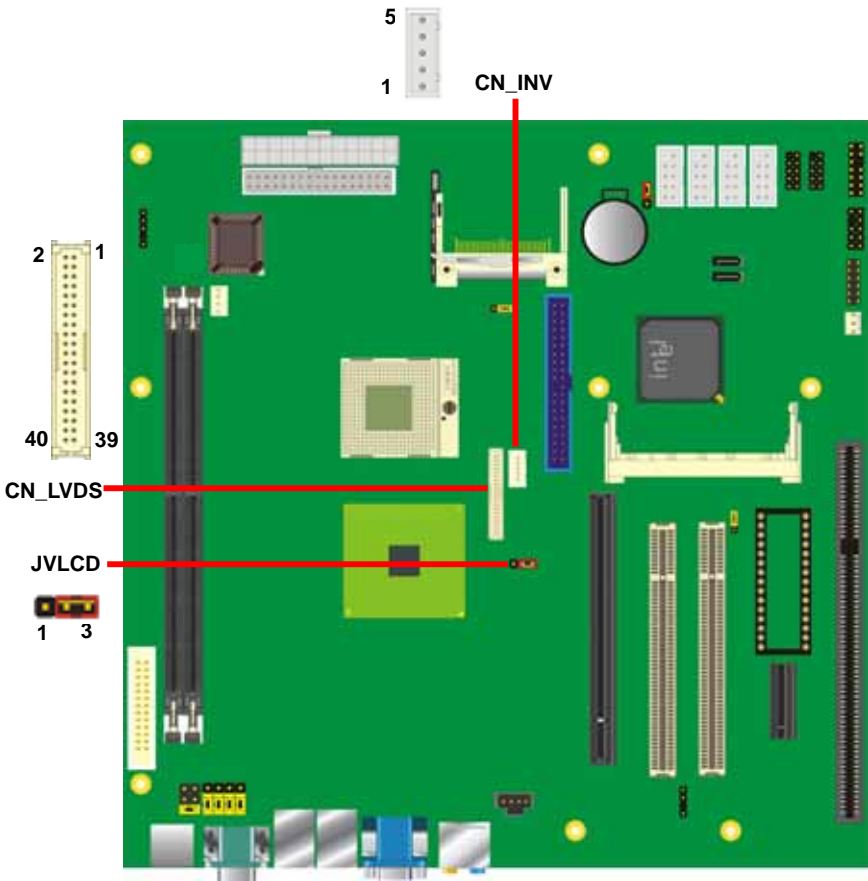

Connector: **CN\_INV**  
Type: 5-pin LVDS Power Header  
Connector model: **JST B5B-XH-A**

Pin	Description
1	+12V
2	GND
3	GND
4	GND
5	ENABKL

Connector: **JVLCD**  
Type: 3-pin Power select Header

Pin	Description
1	VCC(5V)
2	LCDVCC
3	VCC3(3.3)

Connector: **CN\_LVDS**  
Type: onboard 40-pin connector for LVDS connector  
Connector model: **HIROSE DF13-40DP-1.25V**

Pin	Signal	Pin	Signal
2	LCDVCC	1	LCDVCC
4	GND	3	GND
6	ATX0-	5	BTX0-
8	ATX0+	7	BTX0+
10	GND	9	GND
12	ATX1-	11	BTX1-
14	ATX1+	13	BTX1+
16	GND	15	GND
18	ATX2-	17	BTX2-
20	ATX2+	19	BTX2+
22	GND	21	GND
24	ACLK-	23	BTX3-
26	ACLK+	25	BTX3+
28	GND	27	GND
30	ATX3-	29	BCLK-
32	ATX3+	31	BCLK+
34	GND	33	GND
36	N/C	35	N/C
38	N/C	37	N/C
40	N/C	39	N/C


To setup the LCD, you need the component below:

1. A panel with LVDS interfaces.
2. An inverter for panel's backlight power.
3. A LCD cable and an inverter cable.

For the cables, please follow the pin assignment of the connector to make a cable, because every panel has its own pin assignment, so we do not provide a standard cable; please find a local cable manufacture to make cables.

### LCD Installation Guide:


1. Preparing the **PMCA**, **LCD panel** and the **backlight inverter**.

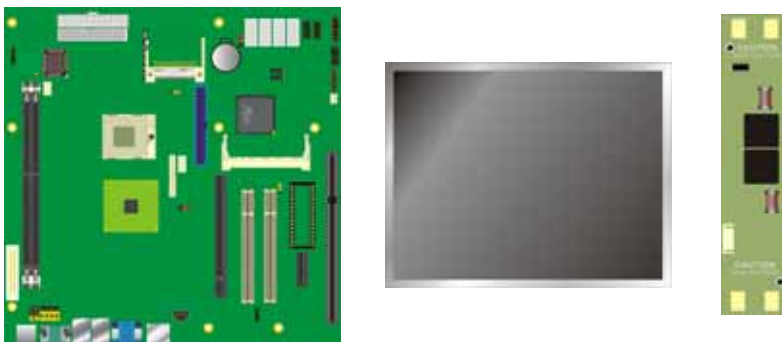

2. Please check the datasheet of the panel to see the voltage of the panel, and set the jumper **JVLCD** to +5V or +3.3V.
3. You would need a LVDS type cable.



4. To connect all of the devices well.

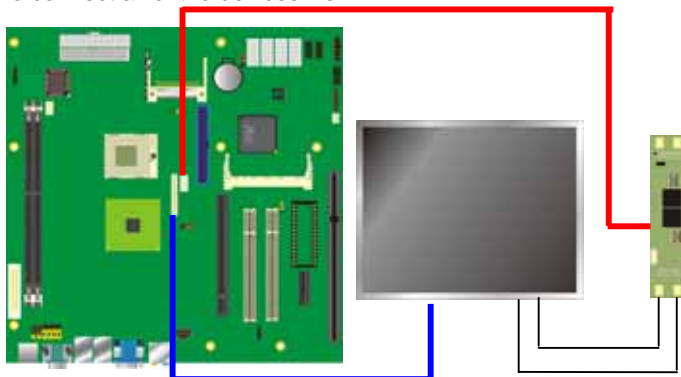

After setup the devices well, you need to select the LCD panel type in the BIOS.



The panel type mapping is list below:

BIOS panel type selection form			
18 bits Single channel		24 bits Dual channel	
NO.	Output format	NO.	Output format
1	640 x 480	9	1024 x 768
2	800 x 600	10	1280 x 768
3	1024 x 768	11	1280 x 1024
24 bits Single channel		12	1366 x 768
4	1280 x 768	13	1400 x 1050 @ 108Mhz
5	1280 x 1024	15	1600 x 1200
6	1366 x 768		
7	1280 x 800		
8	1600 x 1200		
14	1024 x 768		

2.10.3 <HDTV Interface>

The board provides one Mini-Din 7pin support Composite, S-Video and Component .





2.11 <Onboard Audio Interface>

The board provides the onboard AC97 7.1-channel audio interface with Realtek ALC880.

Connector: CN\_AUDIO

Type: 10-pin (2 x 5) 1.27mm x 2.54mm-pitch header

Pin	Description	Pin	Description
1	MIC_L	2	Ground
3	MIC_R	4	ACE Detect
5	Speaker_R	6	MIC Detect
7	SENSE	8	N/C
9	Speaker_L	10	Speaker Detect

Connector: CDIN


Type: 4-pin header (pitch = 2.54mm)

Pin	Description
1	CD – Left
2	Ground
3	Ground
4	CD – Right

Connector: CN\_SPDIFOUT

Type: 4-pin header (pitch = 2.54mm)


Pin	Description
1	+5V
2	N/C
3	SPDIFO
4	Ground

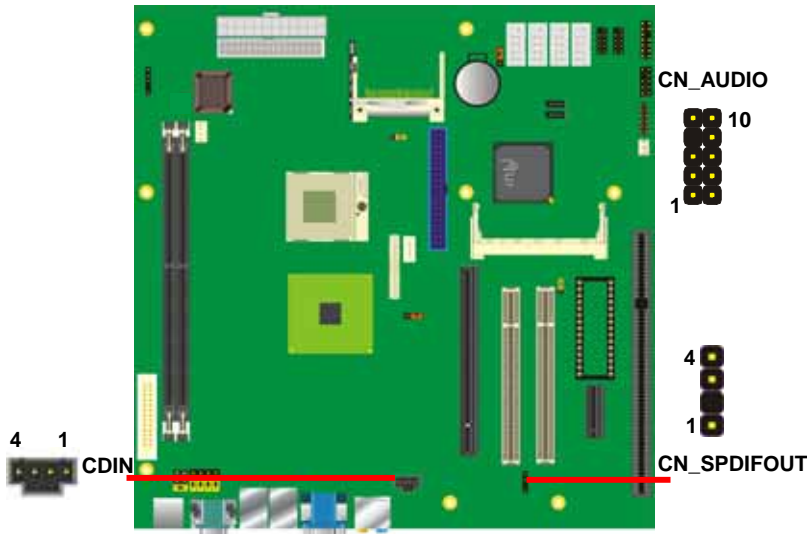

2.12 <USB2.0 Interface>

Based on Intel ICH7-M , the board provides 4USB2.0 ports. The USB2.0 interface provides up to 480Mbps of transferring rate.

Interface	USB2.0
Controller	ICH7-M
Transfer Rate	Up to 480Mb/s
Output Voltage	500mA

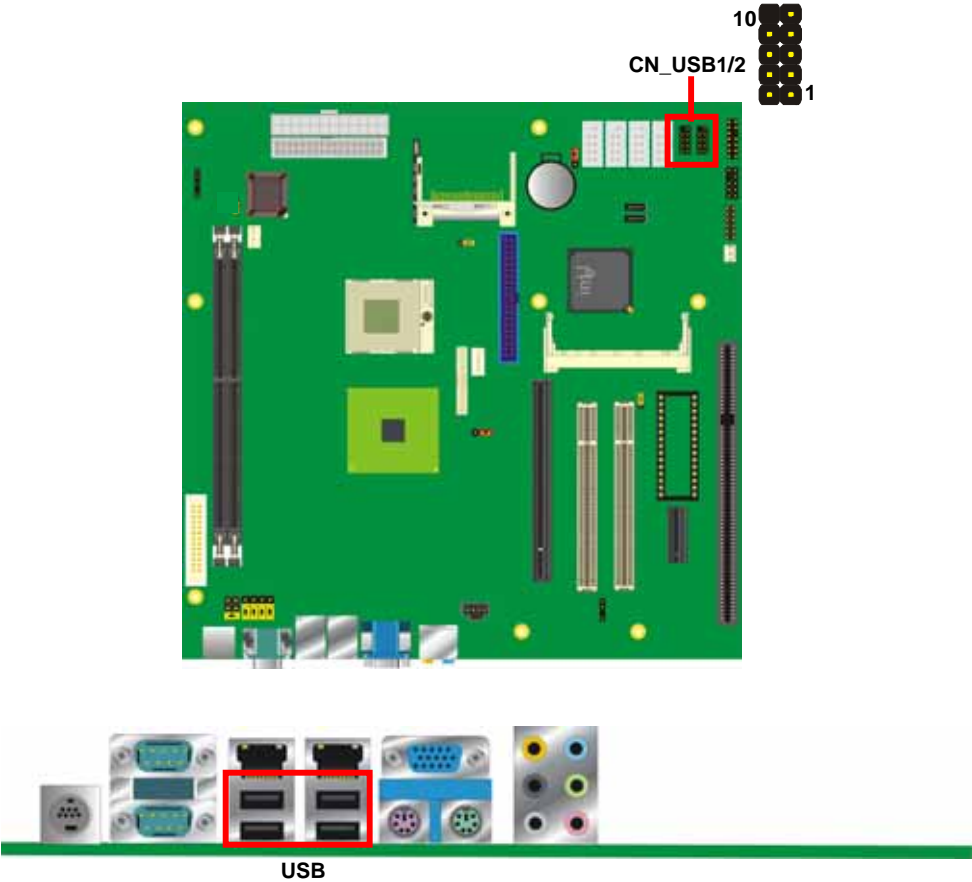

Connector: **CN\_USB**

Type: 10-pin (5 x 2) header for USB1/2 Ports

Pin	Description	Pin	Description
1	VCC	2	VCC
3	Data0-	4	Data1-
5	Data0+	6	Data1+
7	Ground	8	Ground
9	Ground	10	N/C

PS: The USB2.0 will be only active when you connecting with the USB2.0 devices, if you insert an USB1.1 device, the port will be changed to USB1.1 protocol automatically. The transferring rate of USB2.0 as 480Mbps is depending on device capacity, exact transferring rate may not be up to 480Mbps.


### 2.13 <GPIO Interface>

The board provides a programmable 8-bit digital I/O interface; you can use this general purpose I/O port for system control like POS or KIOSK.

Connector: **CN\_DIO**


Type: onboard 2 x 6-pin header, pitch=2.0mm

Pin	Description	Pin	Description
1	Ground	2	Ground
3	GP0	4	GP4
5	GP1	6	GP5
7	GP2	8	GP6
9	GP3	10	GP7
11	VCC	12	+12V

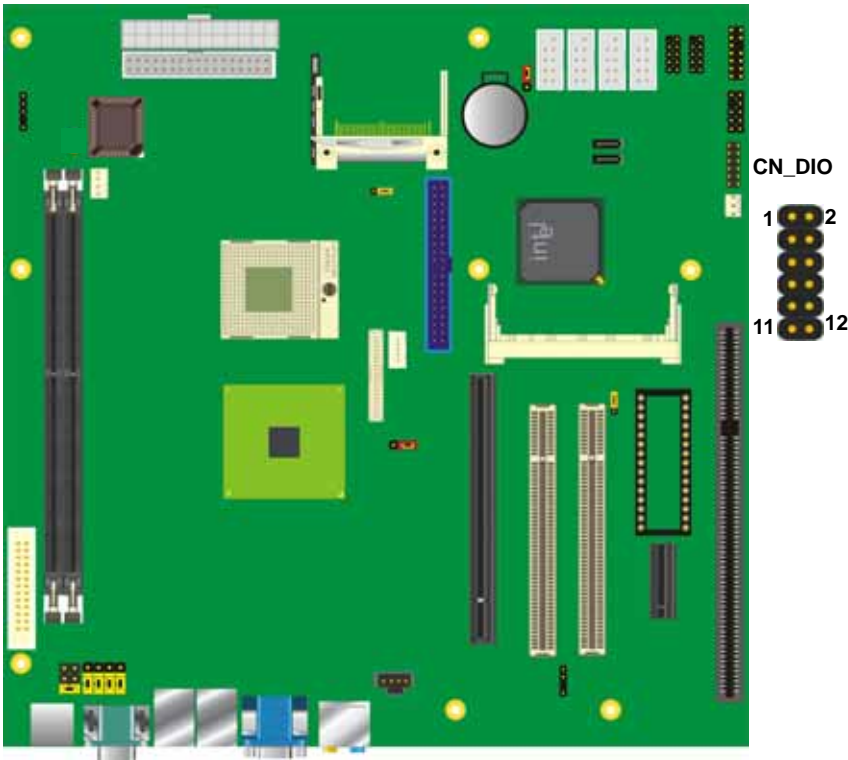

2.14 <Serial Port Jumper Setting >


The board provides six RS232 serial ports, with jumper selectable RS422/485 for COM2.



Connector: **COM2**  
Type: 9-pin D-sub male connector on I/O Panel

Pin	Description	Pin	Description
1	DCD/422RX-/485-	6	RXD/422RX+/485+
2	TXD/422TX+	7	DTR/422TX-
3	GND	8	DSR
4	RTS	9	CTS
5	R1		

	JCSEL1	JCSEL2
RS-232		
RS-485		
RS-422		

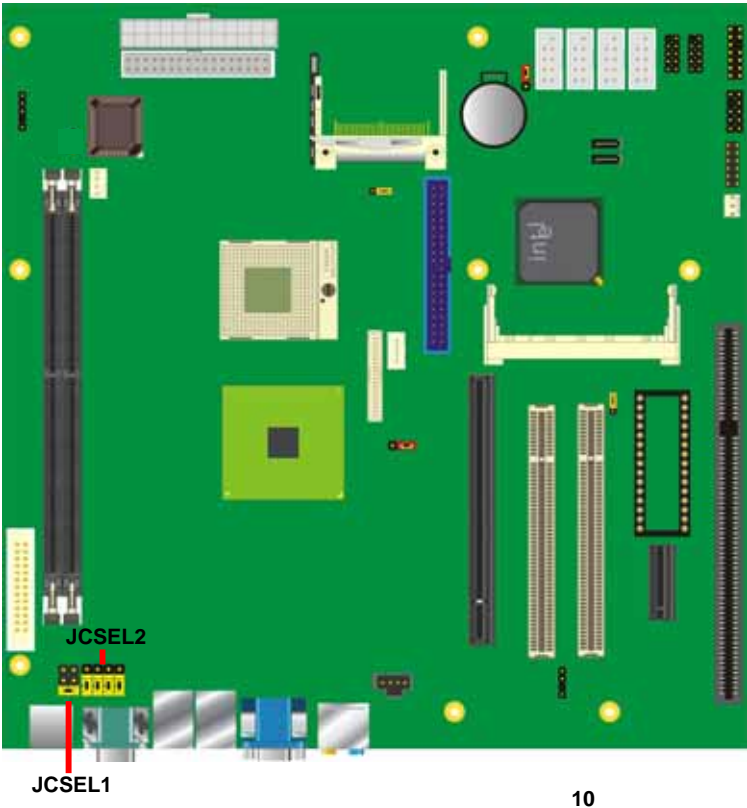

## 2.15 <Power and Fan Connector>

The **PMCA** provides a standard ATX power supply with 24-pin ATX connector , and the board provides one 4-pin fan connector supporting smart fan for CPU cooler and one 3-pin cooler fan connector for system .

### 2.15.1 <Power Connector>

Connector: **ATX**

Type: 24-pin ATX power connector

PIN assignment			
1	3.3V	13	3.3V
2	3.3V	14	-12V
3	GND	15	GND
4	5V	16	PS_ON
5	GND	17	GND
6	5V	18	GND
7	GND	19	GND
8	PW_OK	20	-5V
9	5V_SB	21	5V
10	12V	22	5V
11	12V	23	5V
12	3.3V	24	GND

### 2.15.2 <Fan Connector>

Connector: **SYSFAN**


Type: 3-pin fan wafer connector

Pin	Description	Pin	Description	Pin	Description
1	Ground	2	+12V	3	Fan Control

Connector: **CPUFAN**

Type: 4-pin fan wafer connector

Pin	Description	Pin	Description
1	Ground	2	+12V
3	Fan Speed Detection	4	Sense

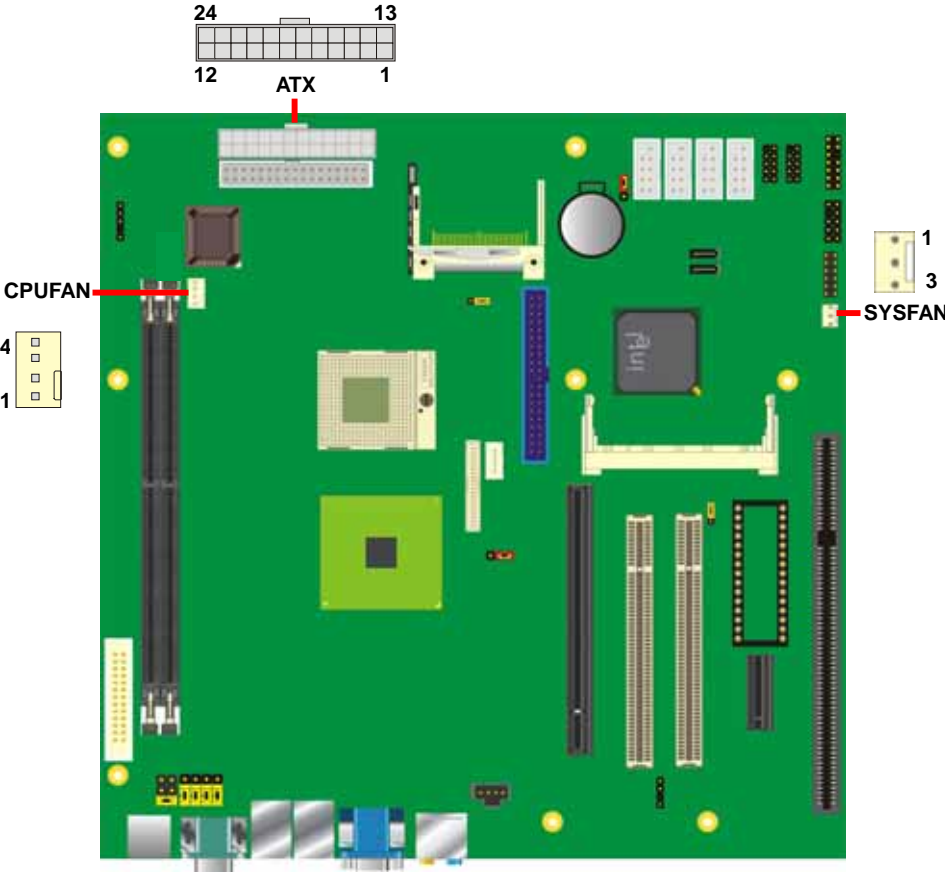




2.16 <Indicator and Switch>

The **JFRNT** provides front control panel of the board, such as power button, reset and beeper, etc. Please check well before you connecting the cables on the chassis.

Connector: **JFRNT**


Type: onboard 14-pin (2 x 7) 2.54-pitch header

Function	Signal	PIN		Signal	Function
IDE LED	HDLED+	1	2	PWRLED+	Power LED
	HDLED-	3	4	N/C	
Reset	Reset+	5	6	PWRLED-	Speaker
	Reset-	7	8	SPK+	
N/C		9	10	N/C	
Power Button	PWRBT-	11	12	N/C	
	PWRBT+	13	14	SPK-	

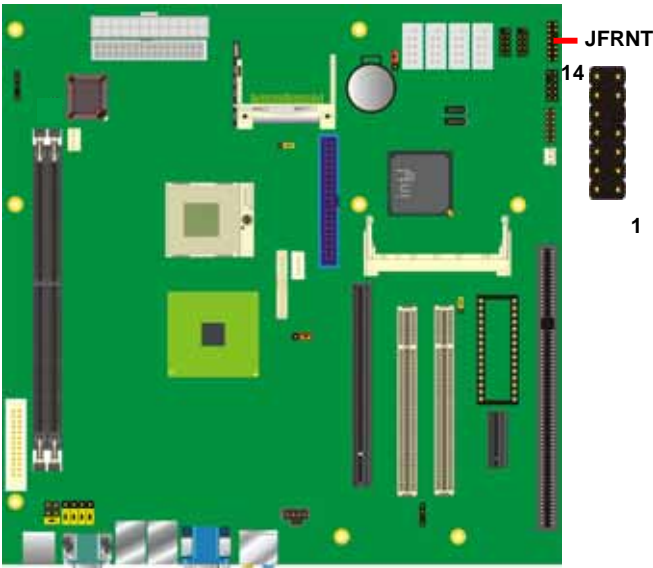

## 2.17 <Expansion Interface>

**PMCA** has one 16x and 1x PCI-Express slots .PCI-Express is the last expansion interface technology, for its serial data transfer scheme, each lane will be up to 500MB/s (duplex), and the 16x (16 lanes) can be up to 8GB/s more than 2GB/s as AGP 8x bus transfer rate. The 16x slot can be also for 1x compatible use.

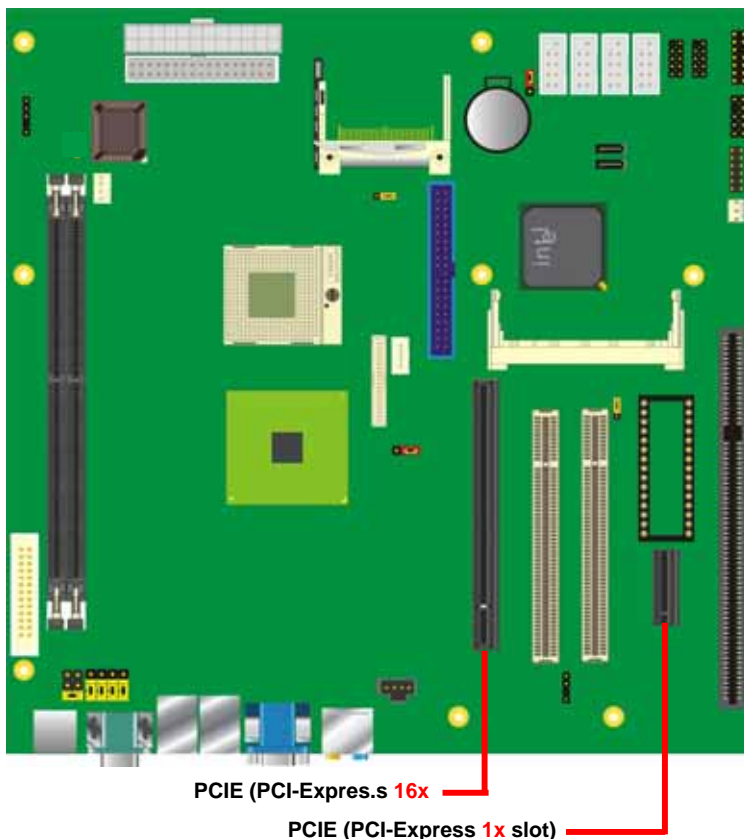

**(This Page is Left For Blank**


# Chapter 3 <System Configuration>

## 3.1 <Video Memory Setup>

Based on Intel® 945GM chipset with GMA (Graphic Media Accelerator) 950, the board supports Intel® DVMT (Dynamic Video Memory Technology) 3.0, which would allow the video memory to be allocated up to 224MB.

To support DVMT, you need to install the Intel GMA 950 Driver with supported OS.

### BIOS Setup:

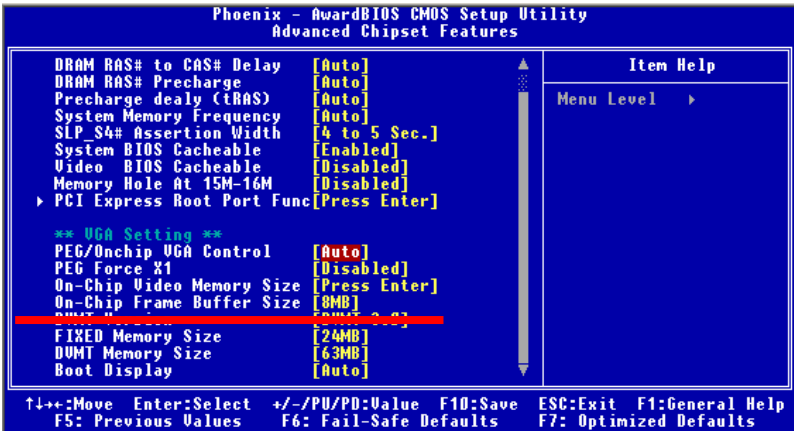

**On-Chip Video Memory Size:** This option combines three items below for setup.

### On-Chip Frame Buffer Size:

This item can let you select video memory which been allocated for legacy VGA and SVGA graphics support and compatibility. The available option is **1MB** and **8MB**.

### Fixed Memory Size:

This item can let you select a static amount of page-locked graphics memory which will be allocated during driver initialization. Once you select the memory amount, it will be no longer available for system memory.

### DVMT Memory Size:

This item can let you select a maximum size of dynamic amount usage of video memory, the system would configure the video memory depends on your application, this item is strongly recommend to be selected as **MAX DVMT**.

Fixed + DVMT Memory Size:

You can select the fixed amount and the DVMT amount at the same time for a guaranteed video memory and additional dynamic video memory, please check the table below for available setting.

System Memory	On-Chip Frame Buffer Size	Fixed Memory Size	DVMT Memory Size	Total Graphic Memory
128MB~255MB	1MB	32MB	0MB	32MB
	1MB	0MB	32MB	32MB
	8MB	32MB	0MB	32MB
	8MB	0	32MB	32MB
256MB~511MB	1MB	64MB	0MB	64MB
	1MB	0	64MB	64MB
	1MB	128MB	0MB	128MB
	1MB	0	128MB	128MB
	1MB	64MB	64MB	128MB
	8MB	64MB	0MB	64MB
	8MB	0	64MB	64MB
	8MB	128MB	0MB	128MB
	8MB	0	128MB	128MB
	8MB	64MB	64MB	128MB
512MB upper	1MB	64MB	0	64MB
	1MB	0	64MB	64MB
	1MB	128MB	0	128MB
	1MB	0	128MB	128MB
	1MB	64MB	64MB	128MB
	8MB	64MB	0	64MB
	8MB	0	64MB	64MB
	8MB	128MB	0	128MB
	8MB	0	128MB	128MB
	8MB	64MB	64MB	128MB

Notice:

- 1. The On-Chip Frame Buffer Size would be included in the Fixed Memory.

Please select the memory size according to this table.

# Chapter 4 <BIOS Setup>


The motherboard uses the Award BIOS for the system configuration. The Award BIOS in the single board computer is a customized version of the industrial standard BIOS for IBM PC AT-compatible computers. It supports Intel x86 and compatible CPU architecture based processors and computers. The BIOS provides critical low-level support for the system central processing, memory and I/O sub-systems.

The BIOS setup program of the single board computer let the customers modify the basic configuration setting. The settings are stored in a dedicated battery-backed memory, NVRAM, retains the information when the power is turned off. If the battery runs out of the power, then the settings of BIOS will come back to the default setting.

The BIOS section of the manual is subject to change without notice and is provided here for reference purpose only. The settings and configurations of the BIOS are current at the time of print, and therefore they may not be exactly the same as that displayed on your screen.

To activate CMOS Setup program, press <DEL> key immediately after you turn on the system. The following message “Press DEL to enter SETUP” should appear in the lower left hand corner of your screen. When you enter the CMOS Setup Utility, the Main Menu will be displayed as **Figure 4-1**. You can use arrow keys to select your function, press <Enter> key to accept the selection and enter the sub-menu.

Figure 4-1 CMOS Setup Utility Main Screen

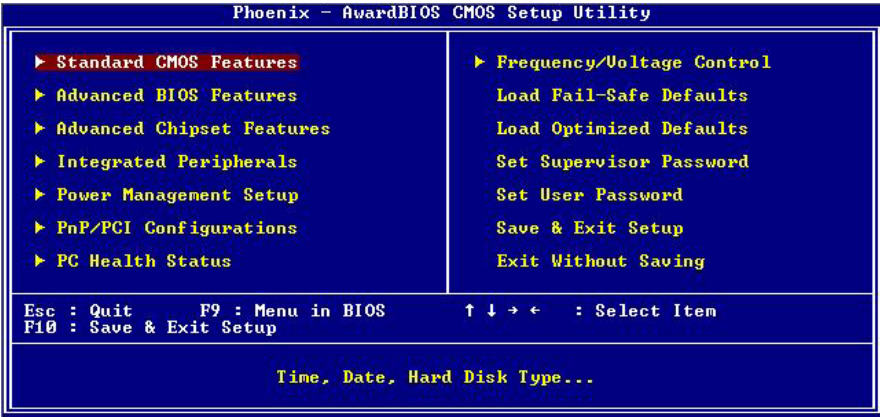

**(This Page is Left for Blank)**

## Appendix A <I/O Port Pin Assignment>

### A.1 <IDE Port>


Connector: IDE  
Type: 40-pin (20 x 2) box header



Pin	Description	Pin	Description
1	Reset	2	Ground
3	D7	4	D8
5	D6	6	D9
7	D5	8	D10
9	D4	10	D11
11	D3	12	D12
13	D2	14	D13
15	D1	16	D14
17	D0	18	D15
19	Ground	20	VCC
21	REQ	22	Ground
23	IOW-/STOP	24	Ground
25	IOR-/HDMARDY	26	Ground
27	IRDY/DDMARDY	28	Ground
29	DACK-	30	Ground
31	IRQ	32	N/C
33	A1	34	CBLID
35	A0	36	A2
37	CS0 (MASTER CS)	38	CS1 (SLAVE CS)
39	LED ACT-	40	Ground

### A.2 <Serial ATA Port>

Connector: SATA1/2  
Type: 7-pin wafer connector



1	2	3	4	5	6	7	8	9
GND	RSATA_TXP1	RSATA_TXN1	GND	RSATA_RXN1	RSATA_RXP1	GND	GND	GND



A.3 <Floppy Port>

Connector: **FDD**

Type: 34-pin (2 x 17) 2.54-pitch header



Pin	Description	Pin	Description
1	Ground	2	DRIVE DENSITY SELECT 0
3	Ground	4	N/C
5	Ground	6	N/C
7	Ground	8	INDEX-
9	Ground	10	MOTOR ENABLE A-
11	Ground	12	N/C
13	Ground	14	DRIVER SELECT A-
15	Ground	16	N/C
17	Ground	18	DIRECTION-
19	Ground	20	STEP-
21	Ground	22	WRITE DATA-
23	Ground	24	WRITE GATE-
25	Ground	26	TRACK 0-
27	Ground	28	WRITE PROTECT-
29	Ground	30	READ DATA-
31	Ground	32	HEAD SELECT-
33	Ground	34	DISK CHANGE-

A.4 <IrDA Port>

Connector: **CN\_IR**

Type: 5-pin header for SIR Ports


Pin	Description
1	VCC
2	N/C
3	IRRX
4	Ground
5	IRTX



A.5 <Serial Port>

Connector: **COM1/2**


Type: 9-pin D-sub male connector on I/O Panel



Pin	Description	Pin	Description
1	DCD	6	DSR
2	SIN	7	RTS
3	SO	8	CTS
4	DTR	9	RI
5	Ground		

Connector: **COM3/4/5/6**

Type: 9-pin D-sub male connector on bracket




Pin	Description	Pin	Description
1	DCD-	6	DSR-
2	SIN-	7	RTS-
3	SO-	8	CTS-
4	DTR-	9	RI
5	Ground	10	N/C

A.6 <CRT Port>

Connector: **CRT**


Type: 15-pin D-sub female connector on I/O Panel



Pin	Description	Pin	Description	Pin	Description
1	RED	6	Ground	11	N/C
2	GREEN	7	Ground	12	5VCDA
3	BLUE	8	Ground	13	HSYNC
4	N/C	9	N/C	14	VSYNC
5	Ground	10	Ground	15	5VCLK

A.7 <LAN Port>


Connector: **RJ451/2**  
Type: RJ45 connector with LED on I/O Panel



Pin	1	2	3	4	5	6	7	8
Description	MI0+	MI0-	MI1+	MI2+	MI2-	MI1-	MI3+	MI3-

A.8 < USB Port >

Connector: **CN\_USB**  
Type: 10-pin (5 x 2) header for dual USB Ports



Pin	Description	Pin	Description
1	VCC	2	VCC
3	Data0-	4	Data1-
5	Data0+	6	Data1+
7	Ground	8	Ground
9	Ground	10	N/C

## Appendix B <Flash BIOS>

### B.1 BIOS Auto Flash Tool

The board is based on Award BIOS and can be updated easily by the BIOS auto flash tool. You can download the tool online at the address below:

<http://www.award.com>

<http://www.commell.com.tw/support/support.htm>

File name of the tool is "awdf flash.exe", it's the utility that can write the data into the BIOS flash ship and update the BIOS.

### B.2 Flash Method

1. Please make a bootable floppy disk.
2. Get the last .bin files you want to update and copy it into the disk.
3. Copy awardflash.exe to the disk.
4. Power on the system and flash the BIOS. (Example: C:/ awardflash XXX.bin)
5. Re-star the system.

Any question about the BIOS re-flash please contact your distributors or visit the web-site at below:

<http://www.commell.com.tw/support/support.htm>

## Appendix C <System Resources>

### C1.<I/O Port Address Map>

---

[00000000 - 0000000F]	Direct memory access controller
[00000010 - 0000001F]	Motherboard resources
[00000020 - 00000021]	Programmable interrupt controller
[00000022 - 0000003F]	Motherboard resources
[00000040 - 00000043]	System timer
[00000044 - 0000005F]	Motherboard resources
[00000060 - 00000060]	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
[00000061 - 00000061]	System speaker
[00000062 - 00000063]	Motherboard resources
[00000064 - 00000064]	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
[00000065 - 0000006F]	Motherboard resources
[00000070 - 00000073]	System CMOS/real time clock
[00000074 - 0000007F]	Motherboard resources
[00000080 - 00000090]	Direct memory access controller
[00000091 - 00000093]	Motherboard resources
[00000094 - 0000009F]	Direct memory access controller
[000000A0 - 000000A1]	Programmable interrupt controller
[000000A2 - 000000BF]	Motherboard resources
[000000C0 - 000000DF]	Direct memory access controller
[000000E0 - 000000EF]	Motherboard resources
[000000F0 - 000000FF]	Numeric data processor
[00000170 - 00000177]	Secondary IDE Channel
[000001F0 - 000001F7]	Primary IDE Channel
[00000200 - 00000200]	Standard Game Port
[00000201 - 00000207]	Standard Game Port
[00000274 - 00000277]	ISAPNP Read Data Port
[00000279 - 00000279]	ISAPNP Read Data Port
[000002E8 - 000002EF]	Communications Port (COM4)
[000002F8 - 000002FF]	Communications Port (COM2)
[00000376 - 00000376]	Secondary IDE Channel
[00000378 - 0000037F]	Printer Port (LPT1)
[000003B0 - 000003BB]	Mobile Intel(R) 945GM Express Chipset Family
[000003C0 - 000003DF]	Mobile Intel(R) 945GM Express Chipset Family
[000003E8 - 000003EF]	Communications Port (COM3)
[000003F0 - 000003F5]	Standard floppy disk controller
[000003F6 - 000003F6]	Primary IDE Channel
[000003F7 - 000003F7]	Standard floppy disk controller
[000003F8 - 000003FF]	Communications Port (COM1)

[00000400 - 000004BF] Motherboard resources  
[000004D0 - 000004D1] Motherboard resources  
[000004E8 - 000004EF] Communications Port (COM6)  
[000004F8 - 000004FF] Communications Port (COM5)  
[00000500 - 0000051F] Intel(R) 82801G (ICH7 Family) SMBus Controller - 27DA  
[00000778 - 0000077B] Printer Port (LPT1)  
[00000800 - 0000087F] Motherboard resources  
[00000880 - 0000088F] Motherboard resources  
[00000A79 - 00000A79] ISAPNP Read Data Port  
[0000C000 - 0000CFFF] Intel(R) 82801G (ICH7 Family) PCI Express Root Port - 27D0  
[0000E000 - 0000EFFF] Intel(R) 82801G (ICH7 Family) PCI Express Root Port - 27D2  
[0000FA00 - 0000FA0F] Intel(R) 82801GBM/GHM (ICH7-M Family) Serial ATA Storage Controller - 27C4  
[0000FB00 - 0000FB1F] Intel(R) 82801G (ICH7 Family) USB Universal Host Controller - 27CB  
[0000FC00 - 0000FC1F] Intel(R) 82801G (ICH7 Family) USB Universal Host Controller - 27CA  
[0000FD00 - 0000FD1F] Intel(R) 82801G (ICH7 Family) USB Universal Host Controller - 27C9  
[0000FE00 - 0000FE1F] Intel(R) 82801G (ICH7 Family) USB Universal Host Controller - 27C8  
[0000FF00 - 0000FF07] Mobile Intel(R) 945GM Express Chipset Family

## C2.<Memory Address Map>

[00000000 - 0009FFFF] System board

[000A0000 - 000BFFFF] PCI bus

[000A0000 - 000BFFFF] Mobile Intel(R) 945GM Express Chipset Family

[000C0000 - 000DFFFF] PCI bus

[000CE600 - 000CFFFF] System board

[000E0000 - 000EFFFF] System board

[000F0000 - 000F7FFF] System board

[000F8000 - 000FBFFF] System board

[000FC000 - 000FFFFF] System board

[00100000 - 3F6DFFFF] System board

[3F6E0000 - 3F6FFFFF] System board

[3F700000 - FEBFFFFF] PCI bus

[FEC00000 - FEC00FFF] System board

[FED13000 - FED1DFFF] System board

[FED20000 - FED8FFFF] System board

[FEE00000 - FEE00FFF] System board

[FFB00000 - FFB7FFFF] System board

[FFB80000 - FFBFFFFF] Intel(R) 82802 Firmware Hub Device

[FFF00000 - FFFFFFFF] System board

**C3.<System IRQ Resources>**

(ISA) 0	System timer
(ISA) 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
(ISA) 3	Communications Port (COM2)
(ISA) 4	Communications Port (COM1)
(ISA) 5	Communications Port (COM3)
(ISA) 6	Standard floppy disk controller
(ISA) 7	Communications Port (COM4)
(ISA) 8	System CMOS/real time clock
(ISA) 9	Microsoft ACPI-Compliant System
(ISA) 10	Communications Port (COM5)
(ISA) 11	Communications Port (COM6)
(ISA) 13	Numeric data processor
(ISA) 14	Primary IDE Channel
(ISA) 15	Secondary IDE Channel
(PCI) 9	Intel(R) 82801G (ICH7 Family) SMBus Controller - 27DA
(PCI) 16	Intel(R) 82801G (ICH7 Family) PCI Express Root Port - 27D0
(PCI) 16	Intel(R) 82801G (ICH7 Family) USB Universal Host Controller - 27CB
(PCI) 16	Microsoft UAA Bus Driver for High Definition Audio
(PCI) 16	Mobile Intel(R) 945GM Express Chipset Family
(PCI) 17	Intel(R) 82801G (ICH7 Family) PCI Express Root Port - 27D2
(PCI) 17	Intel(R) PRO/1000 PL Network Connection
(PCI) 18	Intel(R) 82801G (ICH7 Family) USB Universal Host Controller - 27CA
(PCI) 19	Intel(R) 82801G (ICH7 Family) USB Universal Host Controller - 27C9
(PCI) 23	Intel(R) 82801G (ICH7 Family) USB Universal Host Controller - 27C8
(PCI) 23	Intel(R) 82801G (ICH7 Family) USB2 Enhanced Host Controller - 27CC



## Appendix D <Watch Dog timer Setting >

The watchdog timer makes the system auto-reset while it stops to work for a period. The integrated watchdog timer can be setup as system reset mode by program.

### Timeout Value Range

- 1 to 255
- Second or Minute

### Program Sample

Watchdog timer setup as system reset with 5 second of timeout

2E, 87	
2E, 87	
2E, 07	
2F, 08	Logical Device 8
2E, 30	Activate
2F, 01	
2E, F5	Set as Second*
2F, 00	
2E, F6	Set as 5
2F, 05	

\* Minute: bit 3 = 0; Second: bit 3 = 1

You can select Timer setting in the BIOS, after setting the time options, the system will reset according to the period of your selection.



(This Page is Left for Blank)

## Contact Information

Any advice or comment about our products and service, or anything we can help you please don't hesitate to contact with us. We will do our best to support you for your products, projects and business.

### Taiwan Commate Computer Inc.

Address 8F, No. 94, Sec. 1, Shin Tai Wu Rd., Shi Chih  
Taipei Hsien, Taiwan

TEL +886-2-26963909

FAX +886-2-26963911

Website <http://www.commell.com.tw>

E-Mail [info@commell.com.tw](mailto:info@commell.com.tw) (General Information)  
[tech@commell.com.tw](mailto:tech@commell.com.tw) (Technical Support)

**Commell is a brand name of Taiwan Commate Computer INC**