


PPC-2706GS

AMD Geode™ LX800 Panel PC with 6.5" TFT LCD and Touch Screen

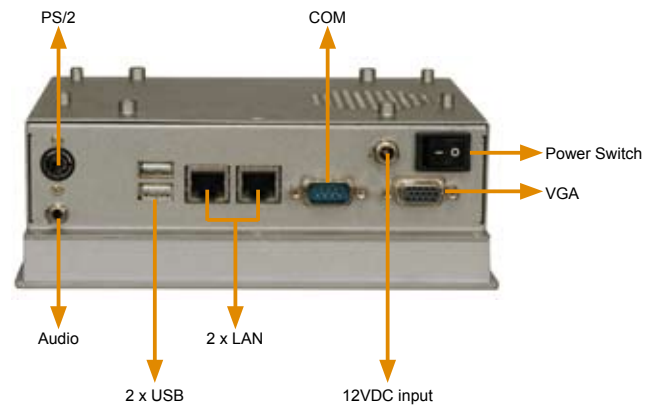

Features


1. 6.5" TFT VGA LCD
2. AMD Geode™ LX-800 processor
3. Supports 1 GB (max.) 333/444 MHz DDR SO-DIMM
4. Dual 10/100Mbps Ethernet
5. One CompactFlash® Type I/II socket
6. Aluminum die-casting front panel compliant with IP 65 standard

Specifications

CPU	AMD Geode™ LX800	Touch Screen	4-wire resistive type with RS-232 interface.
		LCD	- Resolution : 640 x 480 (VGA) - Brightness : 400 cd/m ² - Contrast Ratio : 550:1 - Viewing Angle (H-V): 140/120 - Backlight MTBF : 50000hrs
Chipset	AMD LX 800 + CS5536	Operating Temperature	0°C ~ 50°C.
Memory	One 1 GB (max.) 333/444 MHz DDR SO-DIMM socket	Storage Temperature	-20°C ~ 60°C.
VGA	AMD Geode™ LX800	Vibration	- 5~17Hz 0.1" double amplitude displacement - 17~640 Hz 1.5G acceleration peak to peak
SSD	CF Type II	Shock	10G acceleration peak to peak. (11ms)
Drive Bay	1 x 2.5" SATA/IDE HDD bay	Relative Humidity	5 ~ 95% @ 60° C, non-condensing
Ethernet	Dual Realtek RTL8100C 10/100 Mbps Ethernet controllers	Net / Gross Weight	1.4 Kg / 3.4 Kg
Audio	AC '97 2.3 Realtek ALC655	Dimensions (W x H x D)	183 mm x 143 mm x 62.6 mm
I/O	- 1 x RS-232 port - 2 x USB 2.0 port - 1 x PS/2 ports (KB/MS) - 1 x VGA out - 2 x LAN - 1 x Audio (Line-out) - 1 x IDE - 2 x SATA	Power Supply	AC adapter - 60W, 63000-FSP0601AD101C712-RS - Input: 90 ~ 240VAC @ 50/60Hz, Output: 12VDC
		Front Panel Protection	IP 65 Compliant
Expansion Slot	N/A	Certificate	Meets CE, FCC

High Luminance
500 cd/m² Version
Available

Dimensions (Unit: mm)

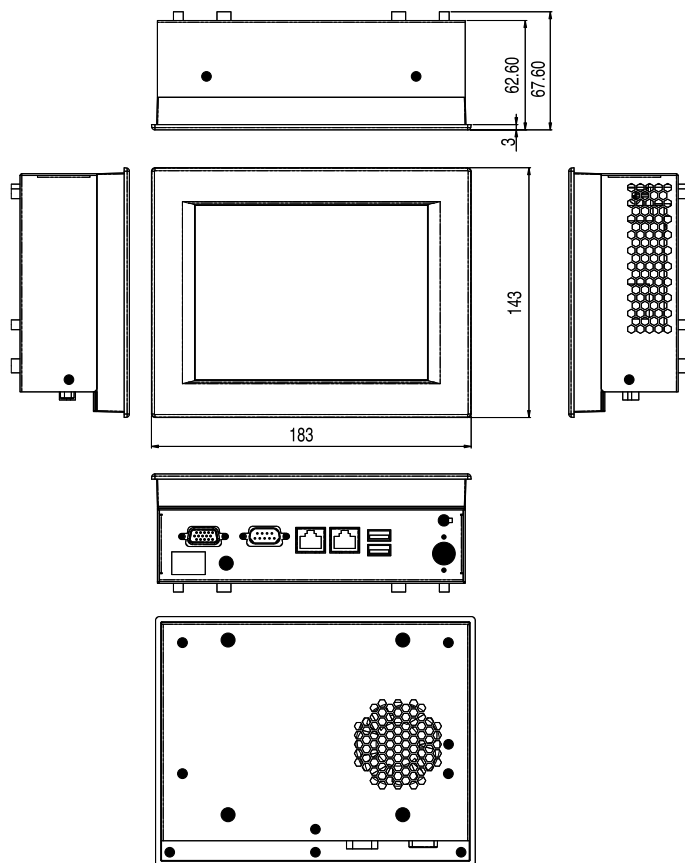

Packing List

Part Number	Description	Amount
19600-000207-RS	Screw Kit	1
33100-000033-RS	Jumper Pack	1
32000-000002-RS	Power Cord	1
63000-FSP601AD101C712-RS	Power Adapter	1
32000-000138-RS	PS/2 Cable	1
PK-065M	Panel Mounting Kits	1
WK-065MS-R10	Wall Mounting Kit	1
19z00-000025-R10	Din Mounting Kit	1
	Touch Screen Driver CD / Touch Pen (For T-R model only)	1
	HDD IDE Cable	2
	User Manual & Driver CD	1

Options

RK-065MS-R10	Rack mount kits
ARM-11-RS	LCD Monitor Arm
STAND-100-RS/STAND-150-RS	LCD Monitor Stand
DK-084MS	Din Mounting Kits


Ordering Information

PPC-2706GHS/LX-800/T-R/256MB	6.5" 500 cd/m ² VGA TFT Panel PC with WAFER-LX-800, Silver color and Touch Screen, 256MB RAM.RoHS
PPC-2706GS/LX-800/T-R/256MB	6.5" 400 cd/m ² VGA TFT Panel PC with WAFER-LX-800, Silver color and Touch Screen, 256MB RAM.RoHS

Compact Size

The compact size is suitable for any places with space limitations.

Only 64.6mm

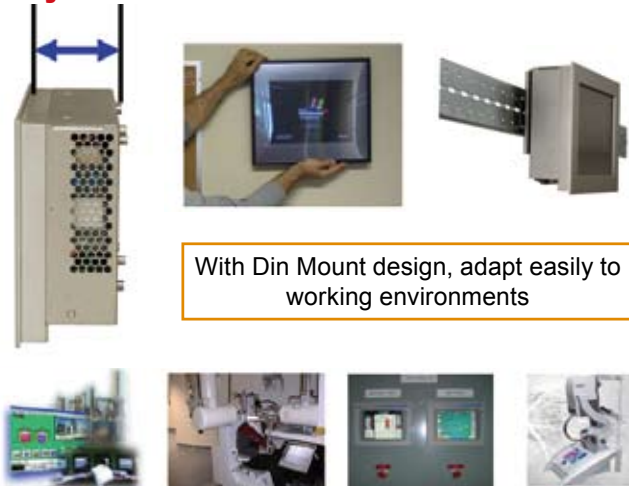

With Din Mount design, adapt easily to working environments

IQ Mount Supporting List

