
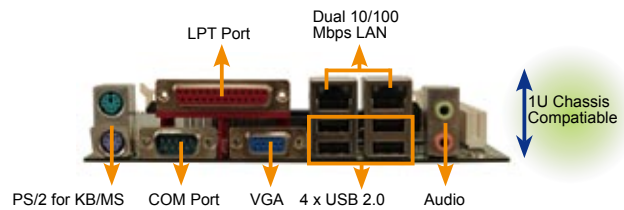


KINO-LX-R11

*Mini-ITX Motherboard with AMD® LX800 500MHz CPU,
Dual LAN, SATA, USB, 6xCOM and Audio*

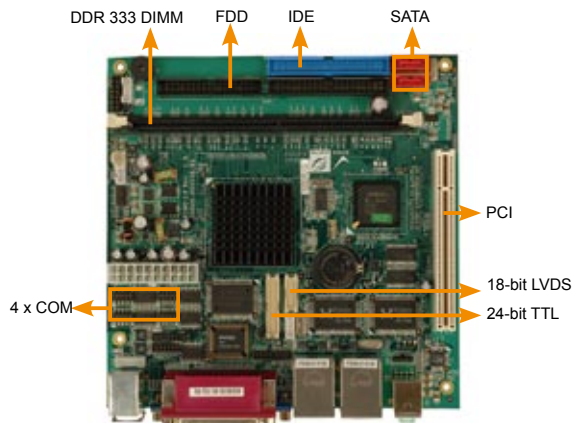

Specifications

- ◆ CPU
 - AMD® LX800 500MHz
- ◆ System Chipsets
 - AMD® LX800 + CS5536
- ◆ BIOS
 - Award BIOS
- ◆ System Memory
 - 1 x 184-pin DDR 333MHz up to 1GB
- ◆ Ethernet
 - Dual Realtek RTL8100C chipsets
- ◆ I/O Interface
 - 5 x RS-232 1 x RS-232/422/485
 - 4 x USB 2.0 2 x IDE
 - 1 x FDD 1 x LPT
 - 2 x SATA VIA VT6421A RAID 0,1 function support.
 - 2 x PS/2 for KB/MS
- ◆ Expansions
 - 1 x PCI
- ◆ Digital I/O
 - 8-bit digital I/O, 4-bit input/ 4-bit output by super I/O
- ◆ Super I/O
 - W83627EHG
- ◆ Infrared Interface
 - By super I/O
- ◆ Audio
 - Realtek ALC203
- ◆ Display Interface
 - VGA integrated in AMD® LX800
 - 24-bit TTL
 - 18-bit single channel LVDS
- ◆ Watchdog Timer
 - Software programable supports 1-255 sec. by super I/O
- ◆ Power Supply
 - AT/ATX support
- ◆ Power Consumption
 - 5V@1.45A, (AMD® LX800 500MHz, DDR 333MHz/512MHz MB-HCT)
- ◆ Temperature
 - Operating: 0°~60°C
- ◆ Humidity
 - Operating: 5%~95%,
- ◆ Dimensions
 - 170 mm x 170 mm
- ◆ Weight
 - GW: 1100 g; NW: 500 g


Packing List

- 1 x KINO-LX Single Board Computer
- 1 x ATA66/100 Flat Cable (P/N: 32200-000052-RS)
- 2 x SATA Cable (P/N: 32000-062800-RS)
- 1 x SATA Power Cable (P/N: 32100-088600-RS)
- 2 x Dual RS-232 Cable (P/N: 32200-028401-RS)
- 1 x I/O Shielding (P/N: 45002-451603-00-RS)
- 1 x Mini Jumper Pack
- 1 x Utility CD
- 1 x QIG (Quick Installation Guide)

Features

1. Mini-ITX form factor with AMD® LX800 500MHz processor
2. DDR 333MHz DIMM socket, maximum memory supported up to 1 GB
3. VGA, 24-bit TTL and 18-bit single channel LVDS
4. SATA, USB, COM, IDE, FDD, LPT and PCI

Dimensions (mm)

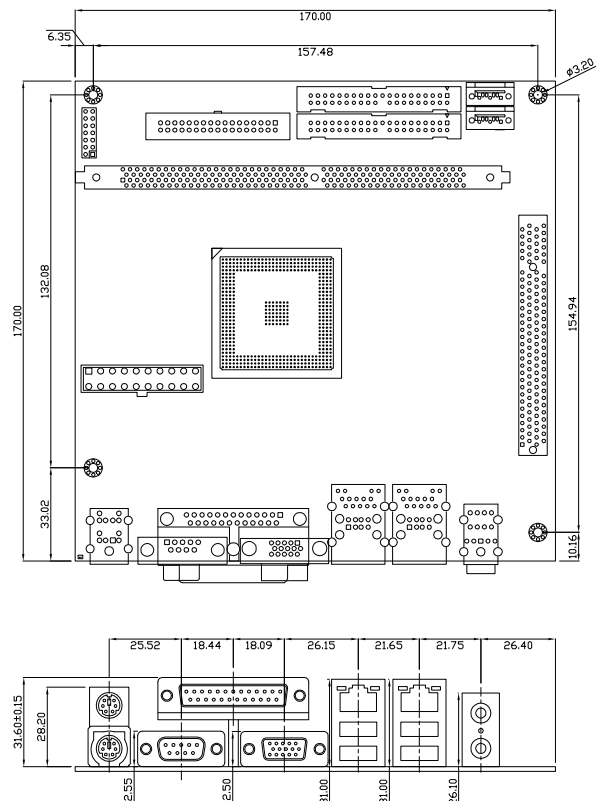

Ordering Information

Part No.	Description
KINO-LX-800-R11	Mini-ITX Motherboard with AMD® LX800 500MHz Processor, CRT/LCD, Dual LAN, SATA and Audio
32200-000077-RS	RS-232/422/485 Cable
32200-000017-RS	FDD Cable